

# DH-SD42216DB-HC

2MP 16x Starlight HDCVI PTZ Camera



- 1/2.8" 2Megapixel STARVIS™ CMOS.
- Powerful 16x optical zoom.
- Starlight technology.
- 120 dB true WDR, 3D NR.
- Max. 25/30 fps@1080p, 25/30/50/60 fps@720p.
- IK10.
- IP66.



## System Overview

With its powerful optical zoom, and accurate pan and tilt capabilities, the HDCVI PTZ camera series provides an all-in-one solution for large-scale monitoring. It harnesses the latest starlight technology, allowing it to produce highly detailed images even in low light conditions. These cameras offer smooth control and high-grade protection that enable them to meet the requirements of video surveillance in small and medium-sized scenes.

## Functions

### Starlight Technology

With advanced image processing technology and optical technology, Dahua Starlight technology can provide clear colorful video in the environment of low illuminance. It widely applies to various environments of low illuminance.

### Wide Dynamic Range

The camera produces vivid images, even in high-contrast lighting conditions, by using industry-leading wide dynamic range (WDR) technology. For scenes that quickly alternate between bright and low lighting, WDR adjusts to fully capture both the bright and dark areas of a scene, producing superior quality videos.

### PFA Technology

PFA technology has introduced new methods of judgment that ensure the accuracy and predictability of the direction of subject distance adjustment. The result is a set of advanced focusing algorithms that ensure image clarity when zooming and that shorten focus time. This makes the camera highly advanced in its functions, substantially improving the quality of your experience.

### Protection (IP66, TVS 6000 V)

IP66, TVS 6000 V lightning proof, surge protection, and voltage transient protection.

### 3DNR

Dahua's 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

### Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 300m for 2MP HD videos through coaxial cables, and up to 200m through UTP cables.

\*The results were obtained and verified through rigorous testing in Dahua's test laboratory.

### 3 Signals over 1 Coaxial Cable

HDCVI technology supports 3 signals (video, audio\* and data) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms.

\* Audio input is available for select HDCVI camera models.

**Technical Specification**

**Camera**

Image Sensor	1/2.8" CMOS
Pixel	2 MP
Max. Resolution	1920 (H) × 1080 (V)
ROM	128 MB
RAM	256 MB
Electronic Shutter Speed	1/3 s–1/30,000 s
Scanning System	Progressive
Min. Illumination	0.005 lux@F1.6 (Color, 30 IRE); 0.0005 lux@F1.6 (B/W, 30 IRE)

**Lens**

Focal Length	5 mm–80 mm			
Max. Aperture	F1.6–F2.8			
Field of View	H: 59.6°–5.4°; V: 34.6°–3.0°; D: 67.3°–6.2°			
Optical Zoom	16x			
Focus Control	Auto; semi-auto; manual			
Close Focus Distance	1 m–1.5 m (3.28 ft–4.92 ft)			
Iris Control	Auto; manual			
DORI Distance	Detect	Observe	Recognize	Identify
	1103.4 m (3620.24 ft)	435.9 m (1429.99 ft)	220.7 m (724.05 ft)	110.3 m (362.02 ft)

**PTZ**

Pan/Tilt Range	Pan: 0° to 360° endless; Tilt: 0° to +90°, auto flip 180°
Manual Control Speed	Pan: 0.1°–300°/s; Tilt: 0.1°–200°/s
Preset Speed	Pan: 0.1°–300°/s; Tilt: 0.1°–200°/s
Preset	300
Tour	8 (up to 32 presets per tour)
Pattern	5
Scan	5
Power-off Memory	Yes
Idle Motion	Pattern; Preset; Scan; Tour
PTZ Protocol	DH-SD Pelco-P/D (Auto recognition)

**Video**

Resolution	1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576/704 × 480)
Video Frame Rate	1080p (25/30 fps); 720p (25/30/50/60 fps)
Day/Night	Yes
BLC	Yes
WDR	120 dB

HLC	Yes
White Balance	Auto; indoor; outdoor; tracking; manual; sodium lamp; natural light; street lamp
Gain Control	Auto; manual
Noise Reduction	2D NR; 3D NR
Defog	Electronic
Digital Zoom	16x
Image Rotation	180°
Privacy Masking	Yes
S/N Ratio	≥ 50 dB

**Function**

CVI Product Output Mode	TVI; CVI; CVBS; AHD (CVBS is only used for debugging)
-------------------------	---

**Certification**

Certifications	CE: EN55032/EN55024/EN50130-4 FCC: Part15 subpart B, ANSI C63.4-2014 UL: UL60950-1+CAN/CSA C22.2, No.60950-1
----------------	--

**Port**

Analog Output	1 channel (CVBS/CVI output, BNC)
RS-485	1 (baud rate range: 1200 bps–9600 bps)
Audio Input	1 channel (LINE IN, bare wire)
Alarm Input	2 (on-off value input: 0–5 VDC)
Alarm Output	1
Alarm Linkage	Scan; tour; pattern; preset; alarm digital output
Alarm Event	Alarm input

**Power**

Power Supply	12 VDC, 3 A ± 10%
Power Consumption	Basic: 8 W Max: 12 W (PTZ)

**Environment**


Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	≤ 95%
Protection	IK10; TVS 6000 V lightning proof; IP66; surge protection; voltage transient protection

**Structure**

Product Dimensions	154.9 mm × Φ170.4 mm (6.10" × Φ6.71")
Net Weight	1.8 kg (3.97 lb)
Gross Weight	3.3 kg (7.28 lb)

## Ordering Information

Type	Model	Description
2MP HDCVI Camera	DH-SD42216DB-HC	2MP 16x Starlight PTZ HDCVI Camera, PAL
	DH-SD42216DBN-HC	2MP 16x Starlight PTZ HDCVI Camera, NTSC
	SD42216DB-HC	2MP 16x Starlight PTZ HDCVI Camera, PAL
	SD42216DBN-HC	2MP 16x Starlight PTZ HDCVI Camera, NTSC
Accessories	DC12V/3A	Power Adapter
	PFA102	Mount Adapter
	PFB300C	Ceiling Mount Bracket
	PFB302S	Wall Mount Bracket
	PFB300S	Wall Mount Bracket
	PFA120	Junction Box
	PFA150	Pole Mount Bracket
	PFA151	Corner Mount Bracket

Ceiling Mount	Wall Mount	Wall Mount
PFA102+PFB300C	PFA102+PFB302S	PFA102+PFB300S+PFA120
		
Corner Mount	Pole Mount (Horizontal)	Pole Mount (Vertical)
PFA102+PFB300S+PFA151	PFA102+PFB300C+PFA150	PFA102+PFB300S+PFA150
		
Ceiling Mount		
/		
		

## Accessories

Included:



DC12V/3A  
Power Adapter

Optional:



PFA102  
Power Adapter



PFB300C  
Ceiling Mount Bracket



PFB302S  
Wall Mount Bracket



PFB300S  
Wall Mount Bracket



PFA120  
Junction Box




PFA150  
Pole Mount Bracket



PFA151  
Corner Mount Bracket

## Dimensions (mm[inch])

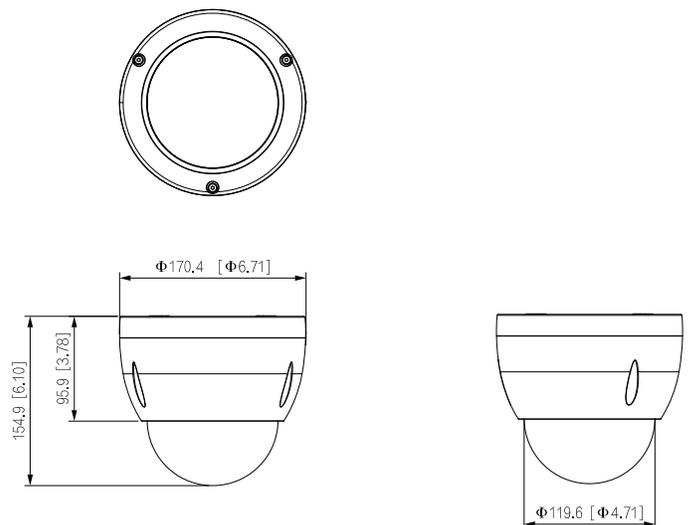

02 62 81 47 05