

# VTH1550CHW-2-S1

2-Wire IP Indoor Monitor



## Features

- 7" TFT Capacitive touch screen
- IPC surveillance(VTNC3000A needed)
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



## Technical Specification

Model	VTH1550CHW-2-S1
-------	-----------------

### System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

### Video

Video Compression	H.264
-------------------	-------

### Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

### Display

LCD Screen	7" 800x480
------------	------------

### Operation Mode

Input	Touch buttons and capacitive screen
-------	-------------------------------------

### Interface

Alarm In	6
Alarm Out	1
RS485	1

### Network


Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

### General


Memory Slot	Micro SD, Max 32GB
-------------	--------------------

Installation	Surface
Power	DC 24V/ supply directly by VTNC3000A
Power Consumption	Work ≤7W
Working Temperature	-10°C to +55°C
Relative Humidity	10%RH-90%RH
Dimensions	200.5mm×136.5mm×22.0mm
Weight	0.8kg

Dimensions

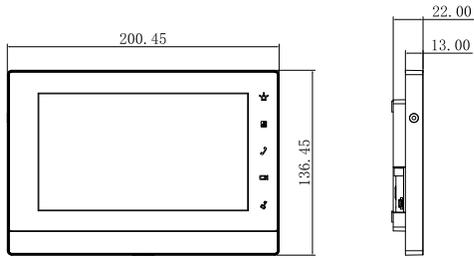

View Area

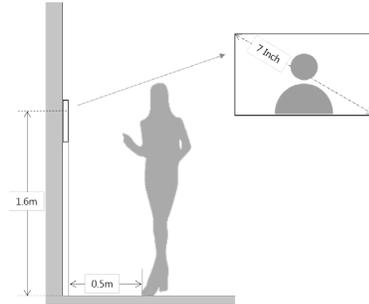

Application

