



## Standard

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GBIT3047.2-92 standard.

## Feature

- 19 inch standard;
- Removable Side Panels, side locks optional;
- Knock off hole for entering cable on both top cover, bottom panel,real panel
- Turning angle of front door is over 180 degrees
- Easy mounting installation
- Unassembled package saving shipping space
- fans, shelf, PDU are optional

## Loading Capacity

80KG

## Degree of Protection

IP20

## Material

SPCC Cold Rolled Steel

Thickness:1.5mm-1.2mm-0.8mm

## Surface Finish:

Powder coating

## Cabinet details



Fan exhaust hole



Fan unit optional



Removable side panels  
(Side lock optional)



Cable entrance on rear panel




Front tempered glass door  
with metal perforated border




Zinc plated mounting  
profile  
(Ground wire optional)

# WM Single Section Wall Mounted Cabinets

## Exploded-View

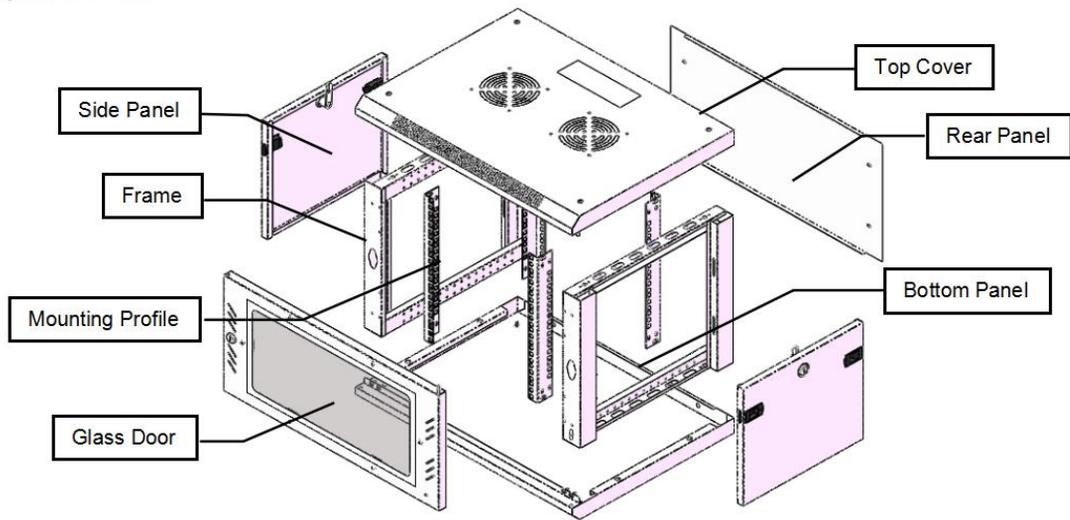

## Main dimension

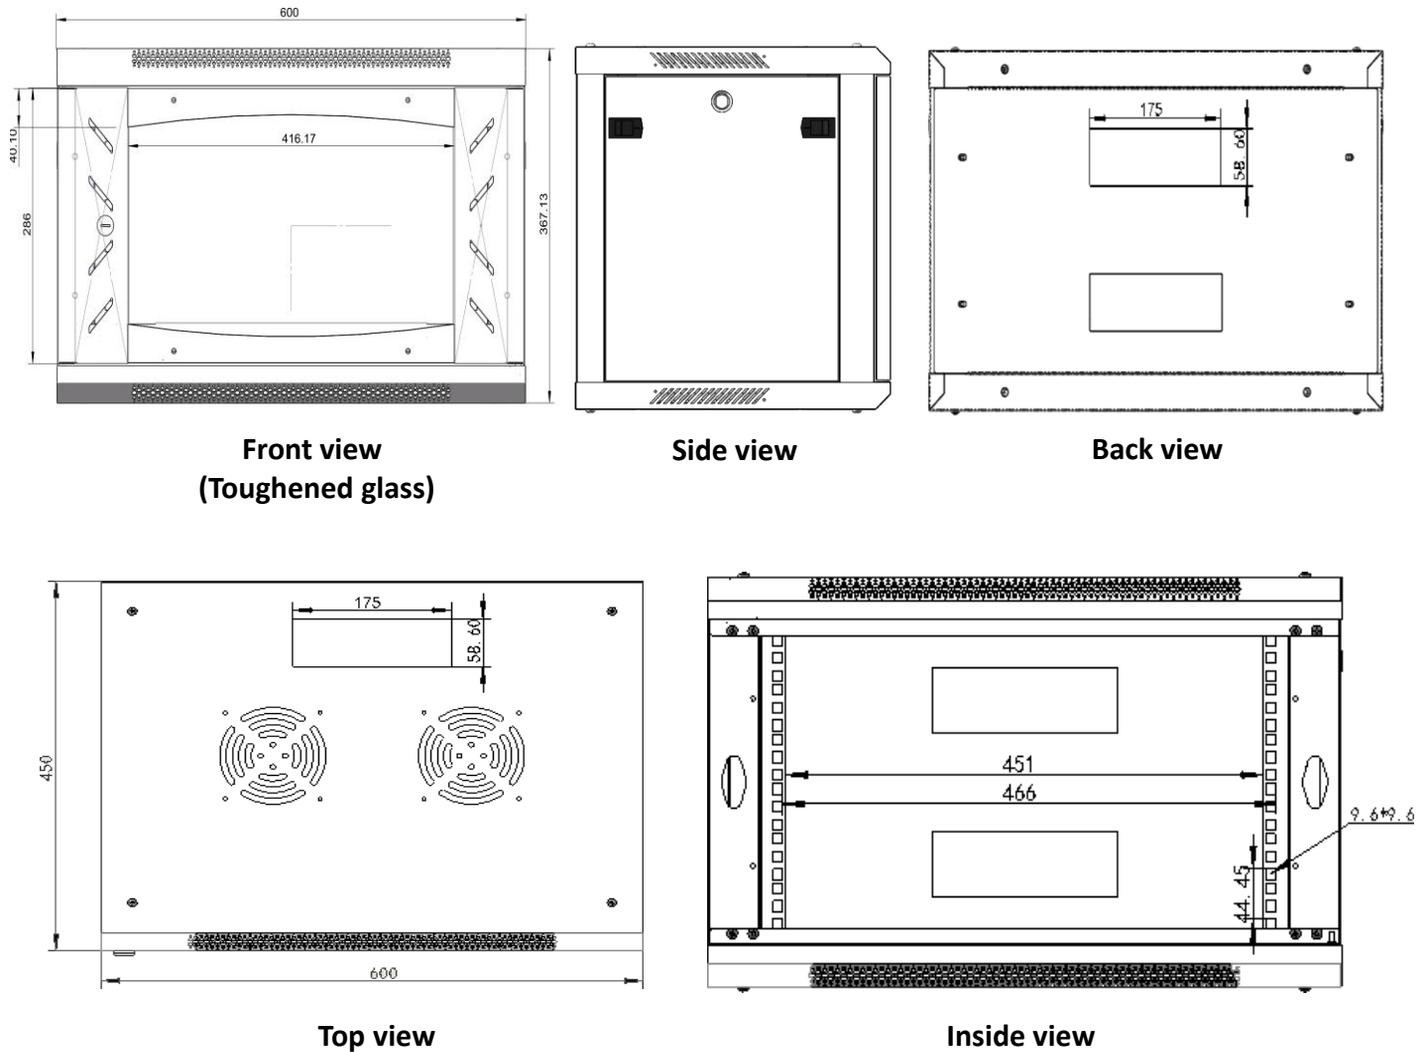

# WM Single Section Wall Mounted Cabinets

## Main Parts

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Mounting profile	4	Piece	Coated Zinc plate t1.5	Coated Zinc	with U mark
2	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	
3	Side panel	2	Piece	SPCC cold rolled steel t0.8	Powder coated	
4	Top cover	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
5	Bottom panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
6	Rear panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
7	Front door	1	Piece	5MM toughened glass door/SPCC t1.0	Powder coated	
8	Lock	1	Piece	Steel	Color Zinc	with 2 keys
9	M6 Square nut	12	Piece	Steel	Color Zinc	
10	M6 B-head screw	12	Piece	Steel	Color Zinc	
11	Allen wrench	1	Piece	Steel	Color Zinc	

## Specification

Model No.	Capacity	Width	Depth	Height	Packing dimension	Volume
	(U)	(mm)	(mm)	(mm)	(mm)	(CBM)
RKM.6404	4	600	450	280	635*485*160	0.049
RKM.6604			600		635*635*230	0.093
RKM.6406	6	600	450	368	635*485*160	0.049
RKM.6606			600		635*635*230	0.093
RKM.6409	9	600	450	501	635*485*235	0.072
RKM.6609			600		635*635*231	0.093
RKM.6412	12	600	450	635	665*595*236	0.093
RKM.6612			600		665*635*231	0.098
RKM.6415	15	600	450	769	635*940*98, 802*460*132	0.137
RKM.6615			600		635*757*236	0.113
RKM.6418	18	600	450	901	635*940*98, 935*460*132	0.137
RKM.6618			600		935*630*236	0.139

## Color

RAL9004	RAL7035
black	grey
	