

# DH-PFA2590

## Pole Mount Bracket



- Built of SUS304 material.
- Suitable for a variety of cameras and is elegant.
- Designed for multiple types of poles that are 50 mm-160 mm wide.



### Series Overview

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

### Scene

Ideal for mounting cameras, and works in temperatures ranging from  $-40^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ ) and in environments with a relative humidity of less than 90%.

### Technical Specification

#### Structure

Casing Material	SUS304
Product Dimensions	$\Phi 50.0\text{ mm} \times 9.0\text{ mm} - \Phi 160.0\text{ mm} \times 9.0\text{ mm}$ ( $\Phi 1.97'' \times 0.35'' - \Phi 6.30'' \times 0.35''$ )
Appearance Color	Stainless Steel (in its natural finish)
Net Weight	0.03 kg (0.07 lb)
Gross Weight	0.04 kg (0.09 lb)
Load Bearing	2.0 kg (4.41 lb)
Installation	Pole mount
Pole Diameter	$\Phi 50\text{ mm} - 160\text{ mm}$ ( $\Phi 1.97'' - 6.30''$ )
Applicable Model	Please see "Camera Accessories Selection"


### Environment

Operating Temperature	$-40^{\circ}\text{C}$ to $+60^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $+140^{\circ}\text{F}$ )
Operating Humidity	<90% (RH); <90% (RH)
Storage Temperature	$-40^{\circ}\text{C}$ to $+60^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $+140^{\circ}\text{F}$ )
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection


### Ordering Information

Type	Model	Description
Camera Mount	DH-PFA2590	Pole Mount Bracket

### Installation

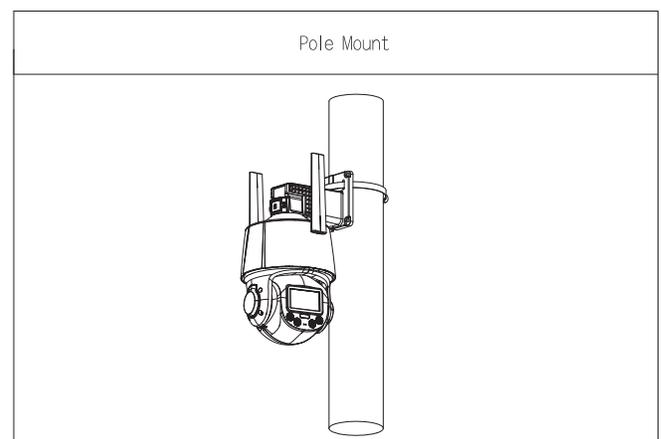

Dimensions (mm[inch])

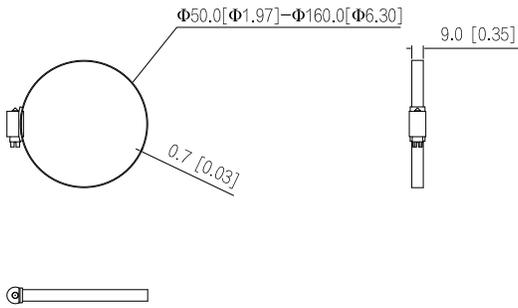

Package Information

- Pole mount bracket × 1

