DH-PFM342-9CH
CCTV Distributed Power Supply box

NEGO+ 02 62 81 47 05

Features

- 9 Channel security camera power supply distribution box with individual LED output indicator and metal case by lock key to prevent unauthorized access.
- Wide voltage input: AC90~264Vac, meet the requirements in different parts for electric network fluctuation.
- High quality and reliability: pass 100% quality examination and 3 months high temperature aging test.
- With overload protection, over-current protection, over-voltage protection, anti-static and anti-interference ability.
- Professional wall-mounted installation with reserved outlet holes, convenient and flexible.
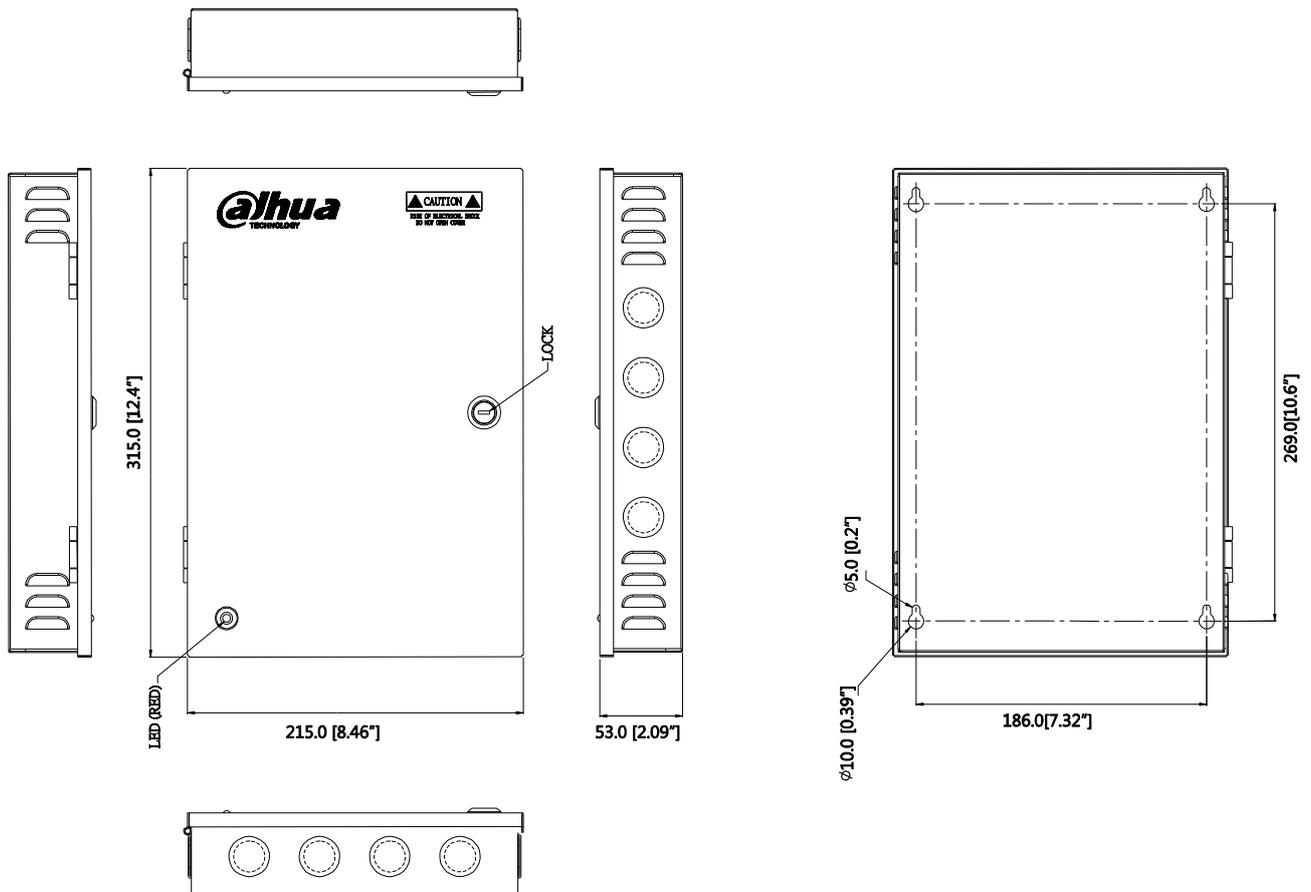
Technical Specifications

Model	DH-PFM342-9CH
General	
Input voltage range	AC90~264V
Outputs	9 x 12VDC (-3%~+7%) Outputs
Maximum output	10A, 120W
Output protection	9 replacement fuses, max. per output 3A
Efficiency	87%
No load power consumption	<0.21W
Surge protected	Line to ground: 4000V Line to line: 2000V
ESD	Contact discharge: 6000V Air discharge: 8000V
Internal ON/OFF power switch	Yes
Individual LED output indicator	Yes
Dimension	315mmx215mmx53mm(12.4"x8.46"x2.09")
Weight	2.47kg(5.45lb)
Color	White
Installation mode	Wall-mounted
Operating temperature	-20℃~+45℃(-4℉~+113℉)
Operating humidity	<90% RH
Certification	CE, FCC

Order Information

Type	Part Number	Description
Power	DH-PFM340-5CH	CCTV distributed power supply _Dahua brand, 5x0.8A, DC12V
	DH-PFM341-9CH	CCTV distributed power supply _Dahua brand, 9x0.55A, DC12V
	DH-PFM342-9CH	CCTV distributed power supply _Dahua brand, 9x1.1A, DC12V
	DH-PFM343-19CH	CCTV distributed power supply _Dahua brand, 19x1.05A, DC12V

Dimensions (mm/inch)

315.0 [12.4"]

LOCK

LED (RED)

215.0 [8.46"]

53.0 [2.09"]

⌀5.0 [0.2"]

⌀10.0 [0.39"]

269.0[10.6"]

186.0[7.32"]

Package Information

- CCTV distributed power supply box DH-PFM342-9CH *1
- Mounting sticker *1
- Fuse *2
- Key *2
- St4 screw *4
- Plastic anchor *4

NEGO+ 02 62 81 47 05